

## Ceiling Boot Assembly

### Assembly Part # 10-01-210

Attaches to framing using two Rheia Hanger Bar Assemblies (00-00-240), or via support blocking. Includes an adjustable damper blade. Must be used with Rheia-approved Ceiling Diffusers (10-04-230 or 10-04-260).

### SPECIFICATIONS

#### Intended Use

For new construction ceiling installations only. For installation into I-joist, open web, and dimensional framing. Joist spacing: Max. 24" o.c. Min. 16" o.c. (when using Hanger Bars).

#### Material

Ceiling Boot: Flame-retardant Polycarbonate /ABS blend.  
 Damper Blade: Flame-retardant Polycarbonate /ABS blend.  
 100% recyclable.

#### Installation


Follow Rheia's Installation Guidelines for detailed installation procedures and practices.  
 When using the Rheia Hanger Bar, once the boot is correctly positioned, fasten the boot to a Hanger Bar using a sheet metal screw with a minimum length of 3/8".  
 When mounting the Ceiling Boot directly to framing, use pan-head wood screws with a minimum length of 5/8".

#### Listings

Manufactured with UL94 V-0 rated engineering thermoplastic.

#### Warranty

2-year limited warranty.  
 For warranty information go to [www.rheiacomfort.com/contact](http://www.rheiacomfort.com/contact).

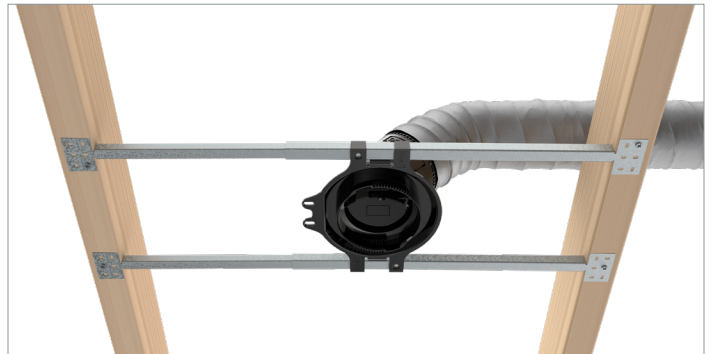

Ceiling Boot Assembly installed with two Hanger Bars



Ceiling Boot Assembly installed directly to framing



Ceiling Boot Assembly with Damper

### DIMENSIONS

#### Assembly Dimensions (with damper closed)

Length 5.9" (148.8 mm)

Width 1.8" (46.2 mm)

Height 6.9" (174.4 mm)

Assembly Weight: 0.19 lbs.