



SPECIFICATIONS SHEET

Slotted Diffuser

Assembly Part #: 10-04-090

Must be used with Rheia High Sidewall Boot part #10-01-200 or Rheia Pass-through Boot part #10-01-210. No integrated airflow adjustment. Airflow balance is integrated into boot assemblies: 10-01-200 & 10-01-210. Use with a ceiling drywall thickness range of: 1/2" to 5/8".

SPECIFICATIONS

Diffuser is available in one size with a 1.5" x 8" free opening area.

Intended Use

For installation in walls or similar applications. The diffuser mounts to the Rheia slotted boots with an integrated click-fit attachment, and can be easily removed for service or cleaning. The diffuser is dishwasher safe. When installed the diffuser is not required to be sealed to the drywall.

HVAC designer to use their discretion when specifying the diffuser location taking into account the required room airflow, throw, and interior framing and mechanical layout limitations.

Material

UV-stabilized ABS.
Color: White.
100% recyclable.

Installation


Follow Rheia's Installation Guidelines for detailed installation procedures and practices.

Listings

Manufactured with UL94 HB, UV-stabilized engineering thermoplastic.

Warranty


2-year limited warranty.
For warranty information go to www.rheiacomfort.com/contact.

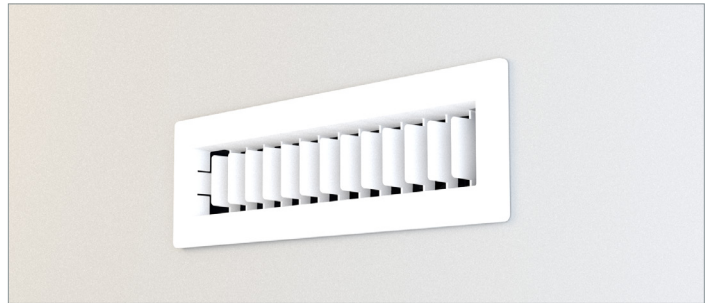

Slotted Diffuser installed in high sidewall configuration



Slotted Diffusers installed in side-by-side configuration

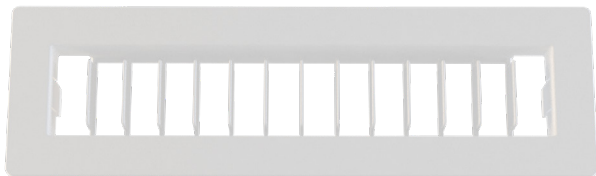

Slotted Diffuser

DIMENSIONS

Part Dimensions:

Height: 2.8" (71.1 mm)
Length: 1.0" (25.4 mm)
Width: 9.1" (238.0 mm)

Part Weight: 0.11 lbs.